


仕様

2本アーム最少間口

アーム


1,500	=	2,090
2,000	=	2,590
2,500	=	3,090
3,000	=	3,590
3,500	=	4,090
5,000	=	5,350

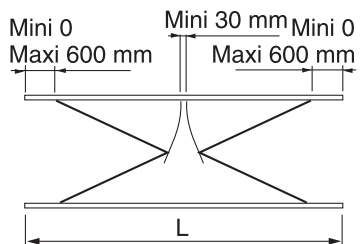

3本アーム最少間口

アーム


1,500	=	3,290
2,000	=	4,040
2,500	=	4,790
3,000	=	5,540
3,500	=	6,290
5,000	=	8,030

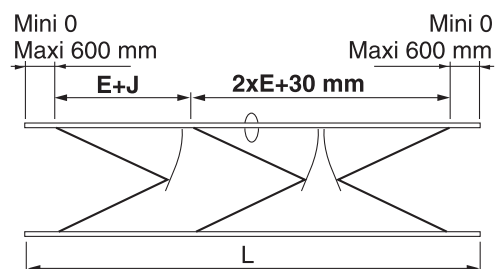

4本アーム最少間口

アーム


1,500	=	4,050
2,000	=	5,050
2,500	=	6,050
3,000	=	7,050
3,500	=	8,050
5,000	=	10,710

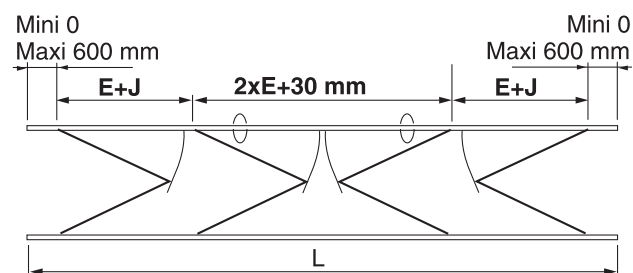

5本アーム最少間口

アーム


1,500	=	5,250
2,000	=	6,500
2,500	=	7,750
3,000	=	9,000
3,500	=	10,250
5,000	=	13,390

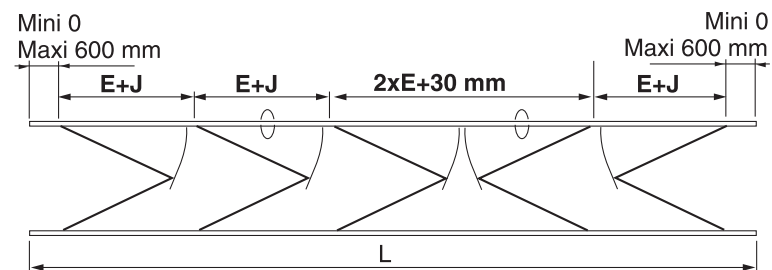

6本アーム最少間口

アーム

1,500	=	6,010
2,000	=	7,510
2,500	=	9,010
3,000	=	10,510
3,500	=	12,010
5,000	=	16,070

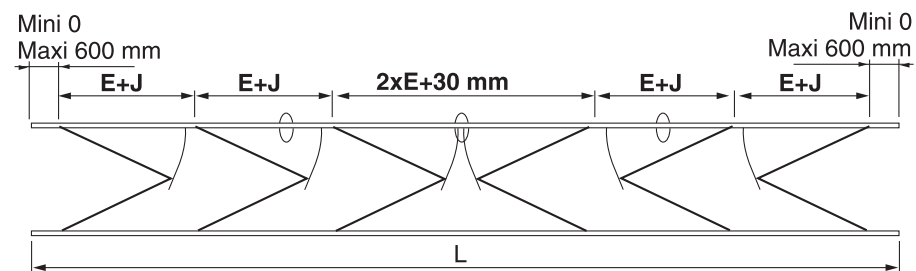

E=アームの仕様

J=アームとアームの間隔

L=ワイド